


**ENGINEERED  
ELECTRONICS, INC.**

**ANNUNCIATOR  
900-275**

## FEATURES

- \* 15 LED INDICATORS
- \* BUZZER WITH VOLUME CONTROL
- \* PLUG-IN CONNECTIONS
- \* POWER ON INDICATOR
- \* SURFACE OR FLUSH MOUNT
- \* LAMP TEST

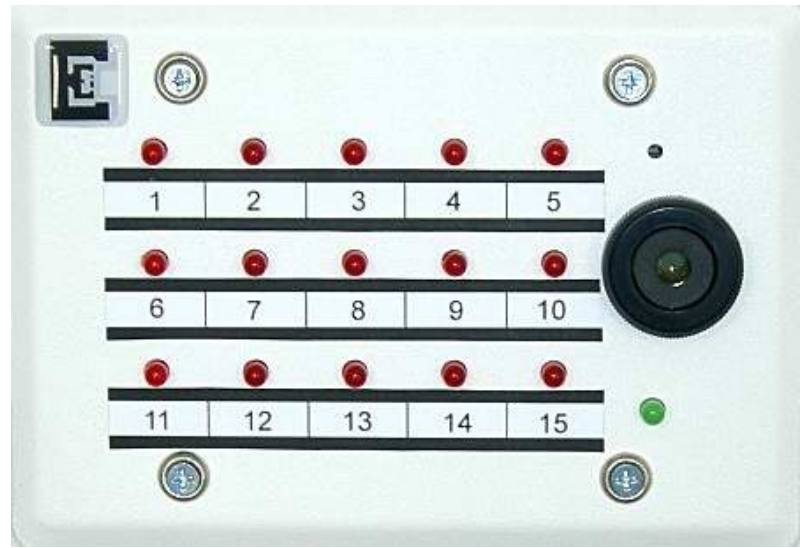

## GENERAL

The 900-275 Annunciator can be used as a basic 15 LED indicator with common buzzer, a simple system with flash output, or visual indicator with 900-203 control panel for DS-2000 systems.

## MOUNTING

FLUSH - 100-828 3 GANG BOX  
SURFACE - 100-833 3 GANG BOX

## POWER SUPPLY

900-826 24 Volts DC 2.5 Amp



ENGINEERED ELECTRONICS, INC. \* 4301 INDUSTRIAL ACCESS ROAD \* DOUGLASVILLE, GA. 30134

12/03/2008

# JUMPERS

Buzzer controlled by Point input.  
Shunt on H9 (1-2) only.

Buzzer intermittent  
Shunt on H6 (1-2) and Flash Rate select (1-1) slow,  
(2-2) mid, (3-3) fast. H-9 is to be left open.

Buzzer controlled by duty output from 900-203 control panel.  
Shunt on H6 (2-3) only.

To activate lamp test insert small screwdriver through hole  
above buzzer.

## TYPICAL WIRING

